

Direct Injection of Gasoline and Diesel Fuel in Methylene Chloride

Column: DB-TPH

30 m x 0.45 mm I.D., 1.0 μ m

J&W P/N: 124-1632

Carrier: Helium at 67 cm/sec, measured at 40°C


Oven: 40°C for 2 min

40-280°C at 12°/min

Injector: Megabore Direct, 250°C

Detector: FID, 250°C

Nitrogen makeup gas at 30 mL/min

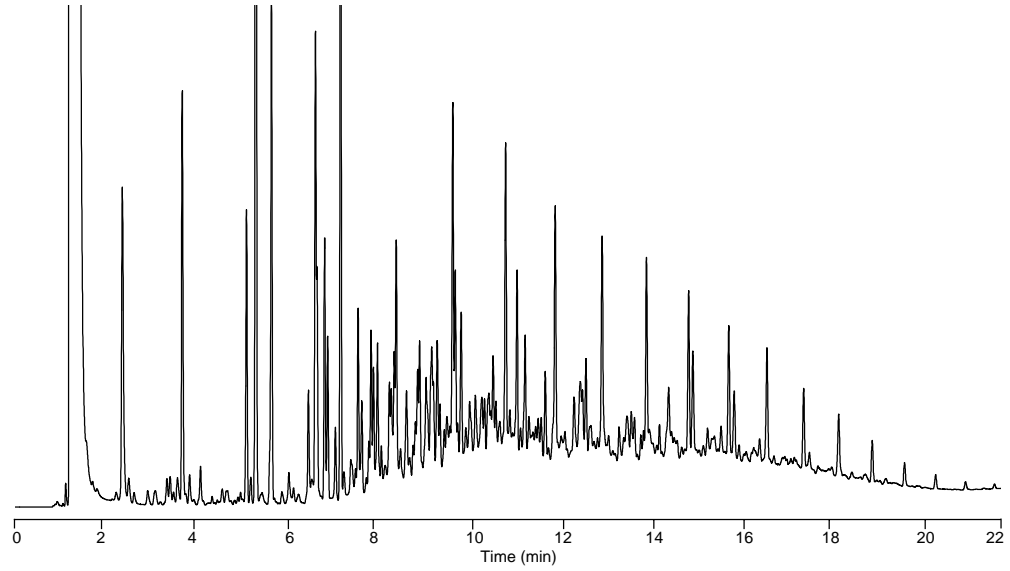

C383